




PREMEX
EFFICIENCY IN CARBIDE MATTERS

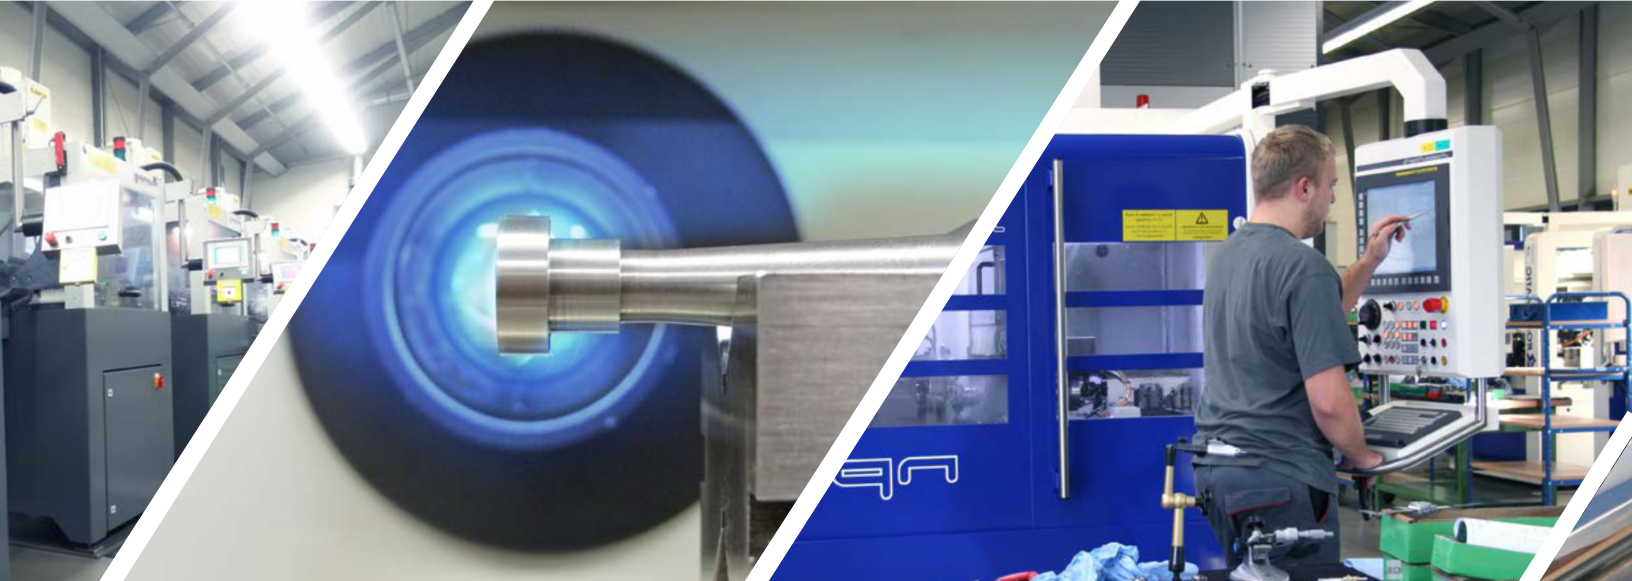

PREMEX: Carbide.

Quality through and through.

PREMEX stands for trading in carbide rods as well as for quick and precise manufacturing of individually ground carbide blanks.

We manage an extensive storage of carbide rods, in solid execution as well as with up to three coolant holes. Furthermore, we supply fixed lengths, milling cutter blanks, flat and square rods.

We grind custom carbide blanks on state-of-the-art machines to a "finished tool" surface finish and an H6 tolerance, or better if desired.

We mainly use carbide from Germany and the European Union with an emphasis on quality. Therefore we are happy to number

notable tool manufacturers and suppliers from all sectors of industry, medicine and metrology among our customers.

If you need a component or series urgently, we are ready to push to our limits. Be assured that you will always get a clear delivery commitment you can count on. Since our foundation in 2000 we have done our best every day to be a reliable and high-performance partner.

Take us at our word. Any time.

Andreas Hummel
Managing Director



PREMEX CARBIDE GRADES

KX 10

Co	6%
WC	94%
Density	14.80 g/cm ³
Hardness	1900 HV 30
Bending strength	> 3900 N/mm ²
Average grain size	0.6 μ

Area of Applications:

- » Grey cast iron
- » Unalloyed steels
- » Plastics
- » Diamond coating

KX 34 on request

Co	9%
WC	91%
Density	14.30 g/cm ³
Hardness	1930 HV30
Bending strength	> 3900 N/mm ²
Average grain size	0.2-0.5 μ

Area of Applications:

- » Grey cast iron
- » Corrosion resistant steels
- » Sandwich materials (GRP,Kevlar)
- » High speed cutting and dry machining

KX 40

Co	10%
WC	90%
Density	14.50 g/cm ³
Hardness	1610 HV30
Bending strength	> 4200 N/mm ²
Average grain size	0.6 μ

Area of Applications:

- » Heat resistant steels
- » Corrosion resistant steels
- » Stainless steels
- » Plastics

KX 44

Co	12%
WC	88%
Density	14.10 g/cm ³
Hardness	1680 HV30
Bending strength	> 4400 N/mm ²
Average grain size	0.5 μ

Area of Applications:

- » Heat resistant steels
- » Corrosion resistant steels
- » Stainless steels
- » Titanium alloys

Milling cutter blanks, KX 40

chamfered
ground to h6

**NET PRICE LIST**

Ø inch	LENGTH inch	Ø mm	LENGTH mm	ARTICLE CODE	
1/8"	1 - 1/2	3.175	38.1	FXRG01/80038-40	•
	2		50.8	FXRG01/80050-40	•
	2 - 1/2		63.5	FXRG01/80063-40	•
	3		76.2	FXRG01/80076-40	•
	4		101.6	FXRG01/80101-40	•
3/16"	2	4.763	50.8	FXRG03/16050-40	•
	2 - 1/2		63.5	FXRG03/16063-40	•
	2 - 3/4		69.9	FXRG03/16069-40	•
	3		76.2	FXRG03/16076-40	•
	4		101.6	FXRG03/16101-40	•
1/4"	2 - 1/2	6.35	63.5	FXRG01/40063-40	•
	3		76.2	FXRG01/40076-40	•
	3 - 1/2		88.9	FXRG01/40088-40	•
	4		101.6	FXRG01/40101-40	•
	4 - 1/2		114.3	FXRG01/40114-40	•
5/16"	2 - 1/2	7.938	63.5	FXRG05/16063-40	•
	3		76.2	FXRG05/16076-40	•
	3 - 3/4		95.3	FXRG05/16095-40	•
	4		101.6	FXRG05/16101-40	•
3/8"	2 - 1/2	9.525	63.5	FXRG03/80063-40	•
	3		76.2	FXRG03/80076-40	•
	3 - 1/2		88.9	FXRG03/80088-40	•
	4		101.6	FXRG03/80101-40	•
	4 - 3/4		120.7	FXRG03/80120-40	•
1/2"	3	12.7	76.2	FXRG01/20076-40	•
	4		101.6	FXRG01/20101-40	•
	5		127.0	FXRG01/20127-40	•
	6		152.4	FXRG01/20152-40	•
5/8"	3	15.88	76.2	FXRG05/80076-40	•
	3 - 1/2		88.9	FXRG05/80088-40	•
	4		101.6	FXRG05/80101-40	•
	5		127.0	FXRG05/80127-40	•
	6		152.4	FXRG05/80152-40	•
3/4"	3	19.05	76.2	FXRG03/40076-40	•
	4		101.6	FXRG03/40101-40	•
	5		127.0	FXRG03/40127-40	•
	6		152.4	FXRG03/40152-40	•
1"	4	25.4	101.6	FXRG01/10101-40	•
	4 - 1/2		114.3	FXRG01/10114-40	•
	5		127.0	FXRG01/10127-40	•
	6		152.4	FXRG01/10152-40	•

• on short notice!

more grades and dimensions on request.

Milling cutter blanks, KX 40 / KX 44

chamfered
ground to h6



NET PRICE LIST

Ø mm	LENGTH mm	ARTICLE CODE	KX 40	ARTICLE CODE	KX 44
3.0	38.3	FXRG03038-40	•	FXRG03038-44	
	40.3	FXRG03040-40	•	FXRG03040-44	
	50.3	FXRG03050-40	•	FXRG03050-44	
4.0	40.3	FXRG04040-40	•	FXRG04040-44	
	50.3	FXRG04050-40	•	FXRG04050-44	
5.0	50.3	FXRG05050-40	•	FXRG05050-44	
6.0	40.3	FXRG06040-40	•	FXRG06040-44	
	50.3	FXRG06050-40	•	FXRG06050-44	•
	58.3	FXRG06058-40	•	FXRG06058-44	•
	60.3	FXRG06060-40	•	FXRG06060-44	
	70.3	FXRG06070-40	•	FXRG06070-44	
	75.3	FXRG06075-40	•	FXRG06075-44	
	80.3	FXRG06080-40	•	FXRG06080-44	
8.0	58.3	FXRG08058-40	•	FXRG08058-44	•
	60.3	FXRG08060-40	•	FXRG08060-44	
	64.3	FXRG08064-40	•	FXRG08064-44	•
	70.3	FXRG08070-40	•	FXRG08070-44	•
	75.3	FXRG08075-40	•	FXRG08075-44	
	80.3	FXRG08080-40	•	FXRG08080-44	•
10.0	60.3	FXRG10060-40	•	FXRG10060-44	•
	70.3	FXRG10070-40	•	FXRG10070-44	
	73.3	FXRG10073-40	•	FXRG10073-44	•
	75.3	FXRG10075-40	•	FXRG10075-44	
	80.3	FXRG10080-40	•	FXRG10080-44	•
12.0	70.3	FXRG12070-40	•	FXRG12070-44	•
	73.3	FXRG12073-40	•	FXRG12073-44	
	75.3	FXRG12075-40	•	FXRG12075-44	•
	84.3	FXRG12084-40	•	FXRG12084-44	•
14.0	75.3	FXRG14075-40	•	FXRG14075-44	•
	84.3	FXRG14084-40	•	FXRG14084-44	•
16.0	75.3	FXRG16075-40	•	FXRG16075-44	•
	85.3	FXRG16085-40	•	FXRG16085-44	•
	93.3	FXRG16093-40	•	FXRG16093-44	•
18.0	84.3	FXRG18084-40	•	FXRG18084-44	•
	93.3	FXRG18093-40	•	FXRG18093-44	•
20.0	105.3	FXRG20105-40	•	FXRG20105-44	•

Milling cutter blanks, KX 40

with Weldon slot acc. to DIN 6535HB
ground to h6



NET PRICE LIST

Ø mm	LENGTH mm	ARTICLE CODE	
6.0	50.3	WXRG06050-40	•
	58.3	WXRG06058-40	•
	60.3	WXRG06060-40	•
	70.3	WXRG06070-40	•
	75.3	WXRG06075-40	•
	80.3	WXRG06080-40	•
	100.3	WXRG06100-40	•
8.0	58.3	WXRG08058-40	•
	60.3	WXRG08060-40	•
	64.3	WXRG08064-40	•
	70.3	WXRG08070-40	•
	75.3	WXRG08075-40	•
	80.3	WXRG08080-40	•
	100.3	WXRG08100-40	•
10.0	60.3	WXRG10060-40	•
	70.3	WXRG10070-40	•
	73.3	WXRG10073-40	•
	75.3	WXRG10075-40	•
	80.3	WXRG10080-40	•
	100.3	WXRG10100-40	•
12.0	70.3	WXRG12070-40	•
	73.3	WXRG12073-40	•
	75.3	WXRG12075-40	•
	84.3	WXRG12084-40	•
	100.3	WXRG12100-40	•
14.0	75.3	WXRG14075-40	•
	84.3	WXRG14084-40	•
	100.3	WXRG14100-40	•
16.0	75.3	WXRG16075-40	•
	85.3	WXRG16085-40	•
	93.3	WXRG16093-40	•
	100.3	WXRG16100-40	•
18.0	84.3	WXRG18084-40	•
	93.3	WXRG18093-40	•
	100.3	WXRG18100-40	•
20.0	100.3	WXRG20100-40	•
	105.3	WXRG20105-40	•

Carbiderods, KX 40 / KX 44

length 100 mm, chamfered
ground to h6



NET PRICE LIST

Ø mm	LENGTH mm	ARTICLE CODE	KX 40	ARTICLE CODE	KX 44
2.0	100.3	10RG0200-40	•	10RG0200-44	
3.0	100.3	10RG0300-40	•	10RG0300-44	•
4.0	100.3	10RG0400-40	•	10RG0400-44	•
4.5	100.3	10RG0450-40	•	10RG0450-44	
5.0	100.3	10RG0500-40	•	10RG0500-44	•
5.5	100.3	10RG0550-40	•	10RG0550-44	
6.0	100.3	10RG0600-40	•	10RG0600-44	•
6.5	100.3	10RG0650-40	•	10RG0650-44	
7.0	100.3	10RG0700-40	•	10RG0700-44	•
8.0	100.3	10RG0800-40	•	10RG0800-44	•
8.5	100.3	10RG0850-40	•	10RG0850-44	
9.0	100.3	10RG0900-40	•	10RG0900-44	•
10.0	100.3	10RG1000-40	•	10RG1000-44	•
10.5	100.3	10RG1050-40	•	10RG1050-44	
11.0	100.3	10RG1100-40	•	10RG1100-44	•
12.0	100.3	10RG1200-40	•	10RG1200-44	•
13.0	100.3	10RG1300-40	•	10RG1300-44	•
14.0	100.3	10RG1400-40	•	10RG1400-44	•
15.0	100.3	10RG1500-40	•	10RG1500-44	•
16.0	100.3	10RG1600-40	•	10RG1600-44	•
17.0	100.3	10RG1700-40	•	10RG1700-44	
18.0	100.3	10RG1800-40	•	10RG1800-44	•
19.0	100.3	10RG1900-40	•	10RG1900-44	
20.0	100.3	10RG2000-40	•	10RG2000-44	•
21.0	100.3	10RG2100-40	•	10RG2100-44	
22.0	100.3	10RG2200-40	•	10RG2200-44	•
23.0	100.3	10RG2300-40	•	10RG2300-44	
24.0	100.3	10RG2400-40	•	10RG2400-44	•
25.0	100.3	10RG2500-40	•	10RG2500-44	•
26.0	100.3	10RG2600-40	•	10RG2600-44	
28.0	100.3	10RG2800-40	•	10RG2800-44	
30.0	100.3	10RG3000-40	•	10RG3000-44	
32.0	100.3	10RG3200-40	•	10RG3200-44	
34.0	100.3	10RG3400-40	•	10RG3400-44	
36.0	100.3	10RG3600-40	•	10RG3600-44	
38.0	100.3	10RG3800-40	•	10RG3800-44	
40.0	100.3	10RG4000-40	•	10RG4000-44	


Milling cutter blanks, KX 40

with 1 axial coolant duct and 2 lat. exits
ground to h6



NET PRICE LIST

ARTICLE CODE	Ø D1 mm	L1 mm	L2 mm	Ø D2 mm	L3 mm	Ø D3 mm	
KUBO206058	6.0	58.3	55.0	1.75	54.6	1.0	•
KUBO206076		76.3	73.0	1.75	72.6	1.0	•
KUBO208064	8.0	64.3	60.0	1.75	59.1	1.2	•
KUBO208101		101.3	97.0	1.75	96.1	1.2	•
KUBO210073	10.0	73.3	68.0	2.00	66.6	1.2	•
KUBO210101		101.3	96.0	2.00	94.6	1.2	•
KUBO212074	12.0	74.3	68.0	2.00	66.1	1.5	•
KUBO212084		84.3	78.0	2.00	76.1	1.5	•
KUBO212101	14.0	101.3	95.0	2.00	93.1	1.5	•
KUBO214084		84.3	77.0	2.00	74.7	1.5	•
KUBO214101	16.0	101.3	94.0	2.00	91.7	1.5	•
KUBO216093		93.3	85.0	4.00	82.2	1.5	•
KUBO216101	18.0	101.3	93.0	4.00	90.2	1.5	•
KUBO218093		93.3	84.0	4.00	80.7	2.0	•
KUBO218102	20.0	102.3	93.0	4.00	89.7	2.0	•
KUBO218151		151.3	142.0	4.00	138.7	2.0	•
KUBO220093	25.0	93.3	83.0	4.00	79.2	2.0	•
KUBO220105		105.3	95.0	4.00	91.2	2.0	•
KUBO220151		151.3	141.0	4.00	137.2	2.0	•
KUBO225122		122.3	109.5	4.00	104.5	2.0	•
KUBO225152		152.3	139.5	4.00	134.5	2.0	•

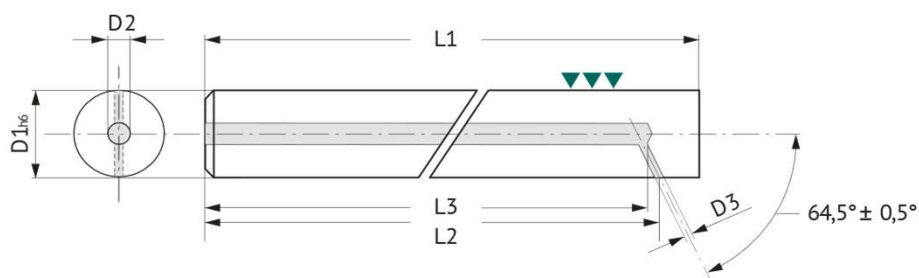


Milling cutter blanks, KX 40

with 1 axial coolant duct and 3 lat. exits
ground to h6



NET PRICE LIST

ARTICLE CODE	Ø D1 mm	L1 mm	L2 mm	Ø D2 mm	L3 mm	Ø D3 mm	
KUBO306058	6.0	58.3	55.0	1.75	54.6	1.0	•
KUBO306076		76.3	73.0	1.75	72.6	1.0	•
KUBO308064	8.0	64.3	60.0	1.75	59.1	1.2	•
KUBO308101		101.3	97.0	1.75	96.1	1.2	•
KUBO310073	10.0	73.3	68.0	2.00	66.6	1.2	•
KUBO310101		101.3	96.0	2.00	94.6	1.2	•
KUBO312074	12.0	74.3	68.0	2.00	66.1	1.5	•
KUBO312084		84.3	78.0	2.00	76.1	1.5	•
KUBO312101	14.0	101.3	95.0	2.00	93.1	1.5	•
KUBO314084		84.3	77.0	2.00	74.7	1.5	•
KUBO314101	16.0	101.3	94.0	2.00	91.7	1.5	•
KUBO316093		93.3	85.0	4.00	82.2	1.5	•
KUBO316101	18.0	101.3	93.0	4.00	90.2	1.5	•
KUBO318093		93.3	84.0	4.00	80.7	2.0	•
KUBO318102	20.0	102.3	93.0	4.00	89.7	2.0	•
KUBO318151		151.3	142.0	4.00	138.7	2.0	•
KUBO320093	25.0	93.3	83.0	4.00	79.2	2.0	•
KUBO320105		105.3	95.0	4.00	91.2	2.0	•
KUBO320151		151.3	141.0	4.00	137.2	2.0	•
KUBO325122		122.3	109.5	4.00	104.5	2.0	•
KUBO325152		152.3	139.5	4.00	134.5	2.0	•

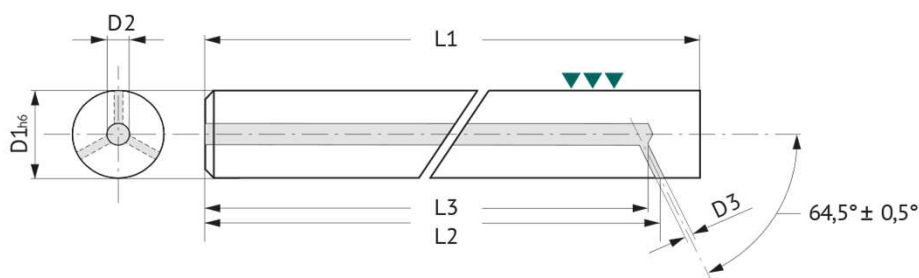


Milling cutter blanks, KX 40

with 1 axial coolant duct and 4 lat. exits
ground to h6



NET PRICE LIST

ARTICLE CODE	Ø D1 mm	L1 mm	L2 mm	Ø D2 mm	L3 mm	Ø D3 mm	
KUBO406058	6.0	58.3	55.0	1.75	54.6	1.0	•
KUBO406076		76.3	73.0	1.75	72.6	1.0	•
KUBO408064	8.0	64.3	60.0	1.75	59.1	1.2	•
KUBO408101		101.3	97.0	1.75	96.1	1.2	•
KUBO410073	10.0	73.3	68.0	2.00	66.6	1.2	•
KUBO410101		101.3	96.0	2.00	94.6	1.2	•
KUBO412074	12.0	74.3	68.0	2.00	66.1	1.5	•
KUBO412084		84.3	78.0	2.00	76.1	1.5	•
KUBO412101	14.0	101.3	95.0	2.00	93.1	1.5	•
KUBO414084		84.3	77.0	2.00	74.7	1.5	•
KUBO414101	16.0	101.3	94.0	2.00	91.7	1.5	•
KUBO416083		83.3	75.0	4.00	72.2	1.5	•
KUBO416093	18.0	93.3	85.0	4.00	82.2	1.5	•
KUBO416101		101.3	93.0	4.00	90.2	1.5	•
KUBO418093	20.0	93.3	84.0	4.00	80.7	2.0	•
KUBO418102		102.3	93.0	4.00	89.7	2.0	•
KUBO418151	25.0	151.3	142.0	4.00	138.7	2.0	•
KUBO420093		93.3	83.0	4.00	79.2	2.0	•
KUBO420105	25.0	105.3	95.0	4.00	91.2	2.0	•
KUBO420151		151.3	141.0	4.00	137.2	2.0	•
KUBO425122	25.0	122.3	109.5	4.00	104.5	2.0	•
KUBO425152		152.3	139.5	4.00	134.5	2.0	•

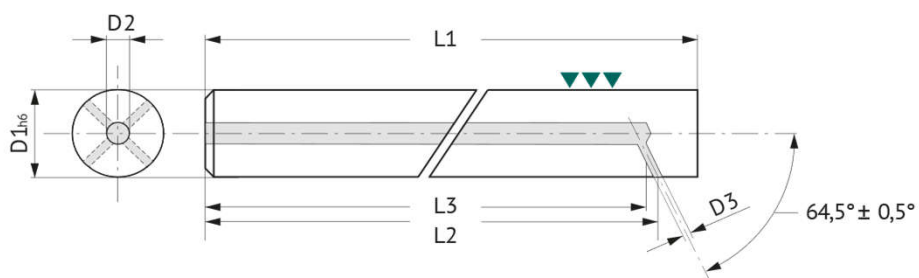


Milling cutter blanks, KX 40

with 1 axial coolant duct and 5 lat. exits
ground to h6



NET PRICE LIST

ARTICLE CODE	Ø D1 mm	L1 mm	L2 mm	Ø D2 mm	L3 mm	Ø D3 mm	
KUBO506058	6.0	58.3	55.0	1.75	54.6	1.0	•
KUBO506076		76.3	73.0	1.75	72.6	1.0	•
KUBO508101	8.0	101.3	97.0	1.75	96.1	1.2	•
KUBO510073	10.0	73.3	68.0	2.00	66.6	1.2	•
KUBO510101		101.3	96.0	2.00	94.6	1.2	•
KUBO512101	12.0	101.3	95.0	2.00	93.1	1.5	•
KUBO516083	16.0	83.3	75.0	4.00	72.2	1.5	•
KUBO516093		93.3	85.0	4.00	82.2	1.5	•
KUBO516101		101.3	93.0	4.00	90.2	1.5	•
KUBO518102	18.0	102.3	93.0	4.00	89.7	2.0	•
KUBO520105	20.0	105.3	95.0	4.00	91.2	2.0	•
KUBO520151		151.3	141.0	4.00	137.2	2.0	•
KUBO525122	25.0	122.3	109.5	4.00	104.5	2.0	•
KUBO525152		152.3	139.5	4.00	134.5	2.0	•

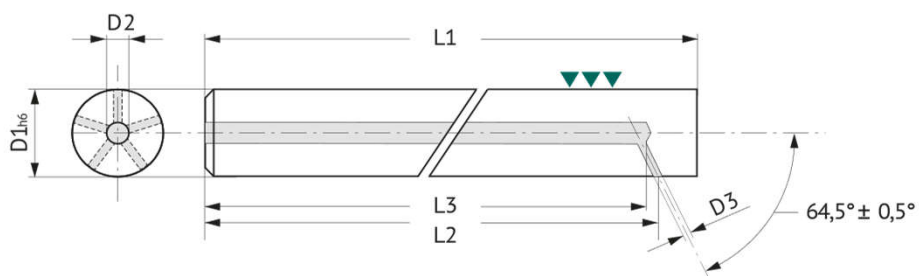

Carbide rods, KX 40

inch dimensions
ground to h6



NET PRICE LIST

Ø inch	Ø mm	LENGTH mm	ARTICLE CODE	
1/16"	1.588	330	33RG01/16-40	•
1/8"	3.175	330	33RG01/80-40	•
3/16"	4.763	330	33RG03/16-40	•
1/4"	6.35	330	33RG01/40-40	•
5/16"	7.938	330	33RG05/16-40	•
3/8"	9.525	330	33RG03/80-40	•
7/16"	11.113	330	33RG07/16-40	•
1/2"	12.7	330	33RG01/20-40	•
9/16"	14.288	330	33RG09/16-40	•
5/8"	15.875	330	33RG05/80-40	•
11/16"	17.463	330	33RG11/16-40	•
3/4"	19.05	330	33RG03/40-40	•
13/16"	20.638	330	33RG13/16-40	•
7/8"	22.225	330	33RG07/80-40	•
15/16"	23.813	330	33RG15/16-40	•
1"	25.4	330	33RG01/10-40	•

Carbide rods, KX 40

unground open tolerance or ground to h6



NET PRICE LIST

Ø mm	LENGTH mm	ARTICLE CODE unground	unground	ARTICLE CODE ground, h6	ground, h6
1.0	330	33RR0120-40	•	33RG0100-40	•
1.5	330	33RR0170-40	•	33RG0150-40	•
2.0	330	33RR0220-40	•	33RG0200-40	•
2.5	330	33RR0270-40	•	33RG0250-40	•
3.0	330	33RR0320-40	•	33RG0300-40	•
3.5	330	33RR0370-40	•	33RG0350-40	•
4.0	330	33RR0420-40	•	33RG0400-40	•
4.5	330	33RR0470-40	•	33RG0450-40	•
5.0	330	33RR0520-40	•	33RG0500-40	•
5.5	330	33RR0570-40	•	33RG0550-40	•
6.0	330	33RR0620-40	•	33RG0600-40	•
6.5	330	33RR0670-40	•	33RG0650-40	•
7.0	330	33RR0720-40	•	33RG0700-40	•
7.5	330	33RR0770-40	•	33RG0750-40	•
8.0	330	33RR0820-40	•	33RG0800-40	•
8.5	330	33RR0870-40	•	33RG0850-40	•
9.0	330	33RR0920-40	•	33RG0900-40	•
9.5	330	33RR0970-40	•	33RG0950-40	•
10.0	330	33RR1020-40	•	33RG1000-40	•
10.5	330	33RR1070-40	•	33RG1050-40	•
11.0	330	33RR1120-40	•	33RG1100-40	•
12.0	330	33RR1220-40	•	33RG1200-40	•
12.5	330	33RR1270-40	•	33RG1250-40	•
13.0	330	33RR1320-40	•	33RG1300-40	•
14.0	330	33RR1420-40	•	33RG1400-40	•
15.0	330	33RR1520-40	•	33RG1500-40	•
16.0	330	33RR1620-40	•	33RG1600-40	•
17.0	330	33RR1720-40	•	33RG1700-40	•
18.0	330	33RR1820-40	•	33RG1800-40	•
19.0	330	33RR1920-40	•	33RG1900-40	•
20.0	330	33RR2020-40	•	33RG2000-40	•
21.0	330	33RR2120-40	•	33RG2100-40	•
22.0	330	33RR2220-40	•	33RG2200-40	•
23.0	330	33RR2320-40	•	33RG2300-40	•
24.0	330	33RR2420-40	•	33RG2400-40	•
25.0	330	33RR2520-40	•	33RG2500-40	•
26.0	330	33RR2620-40	•	33RG2600-40	•
27.0	330	33RR2720-40	•	33RG2700-40	•
28.0	330	33RR2820-40	•	33RG2800-40	•

Carbide rods, KX 40

unground open tolerance or ground to h6



NET PRICE LIST

Ø mm	LENGTH mm	ARTICLE CODE unground	unground	ARTICLE CODE ground, h6	ground, h6
29.0	330	33RR2920-40	•	33RG2900-40	•
30.0	330	33RR3020-40	•	33RG3000-40	•
32.0	330	33RR3220-40	•	33RG3200-40	•
33.0	330	33RR3320-40	•	33RG3300-40	•
34.0	330	33RR3420-40	•	33RG3400-40	•
35.0	330	33RR3520-40	•	33RG3500-40	•
36.0	330	33RR3620-40	•	33RG3600-40	•
38.0	330	33RR3820-40	•	33RG3800-40	•
40.0	330	33RR4020-40	•	33RG4000-40	•

Carbiderods, KX 10 / KX 44

ground to h6

**NET PRICE LIST**

Ø mm	LENGTH mm	ARTICLE CODE	KX 10
4,0	330	33RG0400-10	•
6,0	330	33RG0600-10	•
8,0	330	33RG0800-10	•
10.0	330	33RG1000-10	•
12.0	330	33RG1200-10	•
14.0	330	33RG1400-10	•
16.0	330	33RG1600-10	•
18.0	330	33RG1800-10	•
20.0	330	33RG2000-10	•
22.0	330	33RG2200-10	•
25.0	330	33RG2500-10	•
28.0	330	33RG2800-10	•
30.0	330	33RG3000-10	•

Ø mm	LENGTH mm	ARTICLE CODE	KX 44
3.0	330	33RG0300-44	•
4.0	330	33RG0400-44	•
5.0	330	33RG0500-44	•
6.0	330	33RG0600-44	•
7.0	330	33RG0700-44	•
8.0	330	33RG0800-44	•
9.0	330	33RG0900-44	•
10.0	330	33RG1000-44	•
11.0	330	33RG1100-44	•
12.0	330	33RG1200-44	•
13.0	330	33RG1300-44	•
14.0	330	33RG1400-44	•
15.0	330	33RG1500-44	•
16.0	330	33RG1600-44	•
18.0	330	33RG1800-44	•
20.0	330	33RG2000-44	•
22.0	330	33RG2200-44	•
24.0	330	33RG2400-44	•
25.0	330	33RG2500-44	•

Carbide rods, KX 40

1 central coolant hole, length 330 mm
ground to h6



NET PRICE LIST

Ø inch	Ø mm		HOLE mm	ARTICLE CODE ground, h6	ground, h6
3/16"	4.763		0.8	1GRG03/1608-40	•
1/4"	6.35		1.0	1GRG01/4010-40	•
3/8"	9.525		2.0	1GRG03/8020-40	•
1/2"	12.7		2.0	1GRG01/2020-40	•
5/8"	15.88		2.0	1GRG05/8020-40	•
3/4"	19.05		3.0	1GRG03/4030-40	•
1"	25.4		4.0	1GRG01/1040-40	•

Carbide rods, KX 40

2 parallel coolant hole, length 330 mm
ground to h6

Ø inch	Ø mm	PITCH CIRCLE mm	HOLE mm	ARTICLE CODE ground, h6	ground, h6
3/16"	4.763	1.92	0.8	2GRG03/1620-40	•
		1.40	0.8	2GRG03/1615-40	•
1/4"	6.35	3.40	1.0	2GRG01/4035-40	•
		1.40	0.8	2GRG01/4015-40	•
3/8"	9.525	4.85	1.4	2GRG03/8050-40	•
		2.45	1.0	2GRG03/8026-40	•
1/2"	12.7	5.85	1.8	2GRG01/2060-40	•
		3.35	1.2	2GRG01/2035-40	•
5/8"	15.88	7.85	2.0	2GRG05/8080-40	•
		4.85	1.5	2GRG05/8050-40	•
3/4"	19.05	8.85	2.0	2GRG03/4090-40	•
		6.00	2.0	2GRG03/4062-40	•
1"	25.4	12.75	3.0	2GRG01/1013-40	•
		7.30	2.0	2GRG01/1075-40	•

Carbide rods, KX 40

1 central coolant hole, length 330 mm
unground open tolerance or ground to h6



NET PRICE LIST

Ø	HOLE mm	ARTICLE CODE unground		unground	ARTICLE CODE ground, h6		ground, h6
4.0	0.6	1GRR0406-40		•	1GRG0406-40		•
6.0	0.6	1GRR0606-40	X	•	1GRG0606-40	X	•
	1.0	1GRR0610-40		•	1GRG0610-40		•
	1.5	1GRR0615-40	X	•	1GRG0615-40	X	•
	1.8	1GRR0618-40		•	1GRG0618-40		•
8.0	1.0	1GRR0810-40	X	•	1GRG0810-40	X	•
	1.3	1GRR0813-40		•	1GRG0813-40		•
	1.5	1GRR0815-40	X	•	1GRG0815-40	X	•
	2.0	1GRR0820-40	X	•	1GRG0820-40	X	•
	2.5	1GRR0825-40		•	1GRG0825-40		•
10.0	1.0	1GRR1010-40	X	•	1GRG1010-40	X	•
	1.5	1GRR1015-40	X	•	1GRG1015-40	X	•
	2.0	1GRR1020-40		•	1GRG1020-40		•
	3.0	1GRR1030-40		•	1GRG1030-40		•
12.0	1.0	1GRR1210-40	X	•	1GRG1210-40	X	•
	1.5	1GRR1215-40	X	•	1GRG1215-40	X	•
	2.0	1GRR1220-40		•	1GRG1220-40		•
	3.0	1GRR1230-40		•	1GRG1230-40		•
14.0	2.0	1GRR1420-40		•	1GRG1420-40		•
	3.0	1GRR1430-40		•	1GRG1430-40		•
16.0	2.0	1GRR1620-40		•	1GRG1620-40		•
	2.5	1GRR1625-40		•	1GRG1625-40		•
	3.0	1GRR1630-40		•	1GRG1630-40		•
	4.0	1GRR1640-40		•	1GRG1640-40		•
18.0	3.0	1GRR1830-40		•	1GRG1830-40		•
20.0	2.0	1GRR2020-40	X	•	1GRG2020-40	X	•
	3.0	1GRR2030-40		•	1GRG2030-40		•
	4.0	1GRR2040-40	X	•	1GRG2040-40	X	•
22.0	3.0	1GRR2230-40		•	1GRG2230-40		•
24.0	4.0	1GRR2440-40		•	1GRG2440-40		•
25.0	3.0	1GRR2530-40		•	1GRG2530-40		•
	4.0	1GRR2540-40		•	1GRG2540-40		•
26.0	4.0	1GRR2640-40		•	1GRG2640-40		•
28.0	4.0	1GRR2840-40		•	1GRG2840-40		•
30.0	5.0	1GRR3050-40		•	1GRG3050-40		•
32.0	5.0	1GRR3250-40		•	1GRG3250-40		•

Carbide rods, KX 40

2 parallel coolant holes, length 330 mm
unground open tolerance or ground to h6



NET PRICE LIST

Ø	PITCH CIRCLE mm	HOLE mm	ARTICLE CODE unground		ungorund	ARTICLE CODE ground, h6		ground, h6
4.0	1.8	0.8	2GRR0418-40		•	2GRG0418-40		•
5.0	2.0	0.8	2GRR0520-40		•	2GRG0520-40		•
6.0	1.1	0.5	2GRR0611-40	X	•	2GRG0611-40	X	•
	1.5	0.8	2GRR0615-40		•	2GRG0615-40		•
	2.0	0.8	2GRR0620-40		•	2GRG0620-40		•
	3.0	1.0	2GRR0630-40		•	2GRG0630-40		•
7.0	1.8	0.8	2GRR0718-40		•	2GRG0718-40		•
	3.5	1.0	2GRR0735-40		•	2GRG0735-40		•
8.0	1.1	0.5	2GRR0811-40	X	•	2GRG0811-40	X	•
	1.5	0.8	2GRR0815-40		•	2GRG0815-40		•
	2.0	0.8	2GRR0820-40		•	2GRG0820-40		•
	2.6	1.0	2GRR0826-40		•	2GRG0826-40		•
	4.0	1.0	2GRR0840-40		•	2GRG0840-40		•
9.0	2.6	1.0	2GRR0926-40		•	2GRG0926-40		•
	4.0	1.4	2GRR0940-40		•	2GRG0940-40		•
10.0	2.6	1.0	2GRR1026-40		•	2GRG1026-40		•
	3.5	1.2	2GRR1035-40		•	2GRG1035-40		•
	5.0	1.4	2GRR1050-40		•	2GRG1050-40		•
11.0	3.5	1.2	2GRR1135-40		•	2GRG1135-40		•
	5.0	1.4	2GRR1150-40		•	2GRG1150-40		•
12.0	2.6	1.0	2GRR1226-40	X	•	2GRG1226-40	X	•
	3.5	1.2	2GRR1235-40		•	2GRG1235-40		•
	6.0	1.8	2GRR1260-40		•	2GRG1260-40		•
13.0	3.5	1.2	2GRR1335-40		•	2GRG1335-40		•
	6.0	1.8	2GRR1360-40		•	2GRG1360-40		•
14.0	2.6	0.9	2GRR1426-40	X	•	2GRG1426-40	X	•
	3.5	1.5	2GRR1435-40	X	•	2GRG1435-40	X	•
	5.0	1.5	2GRR1450-40		•	2GRG1450-40		•
	7.0	1.8	2GRR1470-40		•	2GRG1470-40		•
15.0	5.0	1.5	2GRR1550-40		•	2GRG1550-40		•
	7.0	2.0	2GRR1570-40		•	2GRG1570-40		•
16.0	3.5	1.5	2GRR1635-40	X	•	2GRG1635-40	X	•
	5.0	1.5	2GRR1650-40		•	2GRG1650-40		•
	8.0	2.0	2GRR1680-40		•	2GRG1680-40		•
17.0	6.2	2.0	2GRR1762-40		•	2GRG1762-40		•
	8.0	2.0	2GRR1780-40		•	2GRG1780-40		•
18.0	3.5	1.5	2GRR1835-40	X	•	2GRG1835-40	X	•
	6.2	2.0	2GRR1862-40		•	2GRG1862-40		•
	9.0	2.0	2GRR1890-40		•	2GRG1890-40		•

Carbide rods, KX 40

2 parallel coolant holes, length 330 mm
 unground open tolerance or ground to h6

**NET PRICE LIST**

Ø	PITCH CIRCLE mm	HOLE mm	ARTICLE CODE unground		ungorund	ARTICLE CODE ground, h6		ground, h6
19.0	6.2	2.0	2GRR1962-40		•	2GRG1962-40		•
	9.0	2.0	2GRR1990-40		•	2GRG1990-40		•
20.0	3.5	1.5	2GRR2035-40		•	2GRG2035-40		•
	6.2	2.0	2GRR2062-40		•	2GRG2062-40		•
	10.0	2.5	2GRR2010-40		•	2GRG2010-40		•
21.0	6.2	2.0	2GRR2162-40		•	2GRG2162-40		•
	10.0	2.5	2GRR2110-40		•	2GRG2110-40		•
22.0	5.0	1.5	2GRR2250-40	X	•	2GRG2250-40	X	•
	6.2	2.0	2GRR2262-40		•	2GRG2262-40		•
	11.0	2.5	2GRR2211-40		•	2GRG2211-40		•
23.0	7.5	2.0	2GRR2375-40		•	2GRG2375-40		•
	11.0	2.5	2GRR2311-40		•	2GRG2311-40		•
24.0	7.5	2.0	2GRR2475-40		•	2GRG2475-40		•
	12.0	3.0	2GRR2412-40		•	2GRG2412-40		•
25.0	3.5	1.5	2GRR2535-40	X	•	2GRG2535-40	X	•
	5.0	1.5	2GRR2550-40	X	•	2GRG2550-40	X	•
	7.5	2.0	2GRR2575-40		•	2GRG2575-40		•
	12.0	3.0	2GRR2512-40		•	2GRG2512-40		•
26.0	7.5	2.0	2GRR2675-40		•	2GRG2675-40		•
	13.0	3.0	2GRR2613-40		•	2GRG2613-40		•
28.0	9.0	2.5	2GRR2890-40		•	2GRG2890-40		•
	14.0	3.0	2GRR2814-40		•	2GRG2814-40		•
30.0	9.0	2.5	2GRR3090-40		•	2GRG3090-40		•
	14.0	3.0	2GRR3014-40		•	2GRG3014-40		•
32.0	9.0	2.5	2GRR3290-40		•	2GRG3290-40		•
	14.0	3.0	2GRR3214-40		•	2GRG3214-40		•
34.0	14.0	3.0	2GRR3414-40		•	2GRG3414-40		•

Carbide rods, KX 40

2 coolant holes 30° helix, length 330 mm
 2 coolant holes 40° helix, length 330 mm
 3 coolant holes 30° helix, length 330 mm
 3 coolant holes 40° helix, length 330 mm
 ground to h6



NET PRICE LIST

Ø inch	Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE ground, h6	ground, h6
-----------	---------	--------------------	------------	-------------	----------------------------	------------

2x30°

3/16"	4.763	2.40	0.70	25.92	2V3G03/16-40	•
1/4"	6.35	3.30	1.00	34.55	2V3G01/40-40	•
3/8"	9.525	4.50	1.40	51.83	2V3G03/80-40	•
1/2"	12.7	6.10	1.75	69.11	2V3G01/20-40	•
5/8"	15.88	7.90	1.75	86.38	2V3G05/80-40	•
3/4"	19.05	9.70	2.00	103.66	2V3G03/40-40	•
1"	25.4	13.30	2.00	138.21	2V3G01/10-40	•

Ø inch	Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE ground, h6	ground, h6
-----------	---------	--------------------	------------	-------------	----------------------------	------------

2x40°

3/16"	4.763	1.80	0.50	17.83	2V4G03/16-40	•
1/4"	6.35	2.10	0.50	23.77	2V4G01/40-40	•
3/8"	9.525	3.20	0.75	35.66	2V4G03/80-40	•
1/2"	12.7	4.00	0.90	47.55	2V4G01/20-40	•
5/8"	15.88	5.10	1.20	59.44	2V4G05/80-40	•
3/4"	19.05	6.40	1.40	71.32	2V4G03/40-40	•
1"	25.4	7.60	1.75	95.10	2V4G01/10-40	•

Ø inch	Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE ground, h6	ground, h6
-----------	---------	--------------------	------------	-------------	----------------------------	------------

3x30°

1/4"	6.35	2.75	0.50	34.55	3V3G01/40-40	•
3/8"	9.525	4.95	0.85	51.83	3V3G03/80-40	•
1/2"	12.7	6.55	1.20	69.11	3V3G01/20-40	•
5/8"	15.88	8.05	1.60	86.38	3V3G05/80-40	•
3/4"	19.05	9.95	1.70	103.66	3V3G03/40-40	•
1"	25.4	12.75	2.00	138.21	3V3G01/10-40	•

Ø inch	Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE ground, h6	ground, h6
-----------	---------	--------------------	------------	-------------	----------------------------	------------

3x40°

1/4"	6.350	2.15	0.50	23.77	3V4G01/40-40	•
3/8"	9.525	3.35	0.75	35.66	3V4G03/80-40	•
1/2"	12.7	4.15	0.90	47.55	3V4G01/20-40	•
5/8"	15.88	5.25	1.20	59.44	3V4G05/80-40	•
3/4"	19.05	6.35	1.40	71.32	3V4G03/40-40	•
1"	25.4	7.65	1.75	95.10	3V4G01/10-40	•

Carbide rods, KX 40

2 coolant holes 15° helix, length 330 mm
unground open tolerance or ground to h6



NET PRICE LIST

Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE unground	unground	ARTICLE CODE ground, h6	ground, h6
4.0	2.10	0.60	46.90	2V15R0430-40	•	2V15G0400-40	•
5.0	2.60	0.70	58.62	2V15R0530-40	•	2V15G0500-40	•
6.0	2.60	0.70	70.35	2V15R0630-40	•	2V15G0600-40	•
8.0	3.60	1.25	93.80	2V15R0830-40	•	2V15G0800-40	•
10.0	4.80	1.40	117.25	2V15R1030-40	•	2V15G1000-40	•
12.0	6.25	1.55	140.70	2V15R1230-40	•	2V15G1200-40	•
14.0	6.70	1.90	164.14	2V15R1430-40	•	2V15G1400-40	•
16.0	8.00	2.10	187.59	2V15R1630-40	•	2V15G1600-40	•
18.0	9.00	2.30	211.04	2V15R1830-40	•	2V15G1800-40	•
20.0	10.00	2.50	234.49	2V15R2030-40	•	2V15G2000-40	•
23.0	12.00	2.50	269.67	2V15R2330-40	•	2V15G2300-40	•
26.0	12.00	2.50	304.84	2V15R2630-40	•	2V15G2600-40	•

Carbide rods, KX 40

2 coolant holes 30° helix, length 330 mm
unground open tolerance or ground to h6



NET PRICE LIST

Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE unground	unground	ARTICLE CODE ground, h6	ground, h6
3.0	1.60	0.40	16.32	2V3R0330-40	•	2V3G0300-40	•
4.0	2.10	0.60	21.77	2V3R0430-40	•	2V3G0400-40	•
5.0	2.60	0.70	27.21	2V3R0530-40	•	2V3G0500-40	•
6.0	2.60	0.70	32.65	2V3R0630-40	•	2V3G0600-40	•
7.0	3.50	1.00	38.09	2V3R0730-40	•	2V3G0700-40	•
8.0	3.60	1.25	43.53	2V3R0830-40	•	2V3G0800-40	•
9.0	4.80	1.40	48.97	2V3R0930-40	•	2V3G0900-40	•
10.0	4.80	1.40	54.41	2V3R1030-40	•	2V3G1000-40	•
11.0	5.30	1.40	59.86	2V3R1130-40	•	2V3G1100-40	•
12.0	6.25	1.55	65.30	2V3R1230-40	•	2V3G1200-40	•
13.0	6.50	1.75	70.74	2V3R1330-40	•	2V3G1300-40	•
14.0	6.70	1.90	76.18	2V3R1430-40	•	2V3G1400-40	•
15.0	7.40	1.90	81.62	2V3R1530-40	•	2V3G1500-40	•
16.0	8.00	2.10	87.06	2V3R1630-40	•	2V3G1600-40	•
17.0	8.00	2.10	92.50	2V3R1730-40	•	2V3G1700-40	•
18.0	9.00	2.30	97.95	2V3R1830-40	•	2V3G1800-40	•
19.0	9.00	2.30	103.39	2V3R1930-40	•	2V3G1900-40	•
20.0	10.00	2.50	108.83	2V3R2030-40	•	2V3G2000-40	•
21.0	10.00	2.50	114.27	2V3R2130-40	•	2V3G2100-40	•
22.0	10.00	2.50	119.71	2V3R2230-40	•	2V3G2200-40	•
23.0	12.00	2.50	125.15	2V3R2330-40	•	2V3G2300-40	•
24.0	12.00	2.50	130.59	2V3R2430-40	•	2V3G2400-40	•
25.0	12.00	2.50	136.03	2V3R2530-40	•	2V3G2500-40	•
26.0	12.00	2.50	141.48	2V3R2630-40	•	2V3G2600-40	•
28.0	15.40	2.50	152.36	2V3R2830-40	•	2V3G2800-40	•
30.0	16.00	2.50	163.24	2V3R3030-40	•	2V3G3000-40	•
32.0	17.20	3.00	174.12	2V3R3230-40	•	2V3G3200-40	•

Carbide rods, KX 40

2 coolant holes 40° helix. length 330 mm
unground open tolerance or ground to h6



NET PRICE LIST

Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE unground	unground	ARTICLE CODE ground, h6	ground, h6
6.0	2.20	0.50	22.46	2V4R0630-40	•	2V4G0600-40	•
	1.30	0.30	22.46	2V4R0613-40	•	2V4G0613-40	•
	1.40	0.40	22.46	2V4R0614-40	•	2V4G0614-40	•
7.0	2.40	0.65	26.21	2V4R0730-40	•	2V4G0700-40	•
8.0	2.70	0.65	29.95	2V4R0830-40	•	2V4G0800-40	•
	1.70	0.40	29.95	2V4R0817-40	•	2V4G0817-40	•
9.0	3.20	0.75	33.70	2V4R0930-40	•	2V4G0900-40	•
10.0	3.50	0.80	37.44	2V4R1030-40	•	2V4G1000-40	•
	2.10	0.50	37.44	2V4R1021-40	•	2V4G1021-40	•
11.0	3.70	0.80	41.18	2V4R1130-40	•	2V4G1100-40	•
12.0	4.20	0.90	44.93	2V4R1230-40	•	2V4G1200-40	•
	2.50	0.60	44.93	2V4R1225-40	•	2V4G1225-40	•
13.0	4.40	0.90	48.67	2V4R1330-40	•	2V4G1300-40	•
14.0	4.70	1.00	52.42	2V4R1430-40	•	2V4G1400-40	•
	2.90	0.70	52.42	2V4R1429-40	•	2V4G1429-40	•
15.0	5.10	1.10	56.16	2V4R1530-40	•	2V4G1500-40	•
16.0	5.50	1.20	59.90	2V4R1630-40	•	2V4G1600-40	•
	3.30	0.80	59.90	2V4R1633-40	•	2V4G1633-40	•
17.0	5.90	1.20	63.65	2V4R1730-40	•	2V4G1700-40	•
18.0	6.30	1.40	67.39	2V4R1830-40	•	2V4G1800-40	•
	3.70	0.90	67.39	2V4R1837-40	•	2V4G1837-40	•
19.0	6.70	1.40	71.14	2V4R1930-40	•	2V4G1900-40	•
20.0	7.10	1.50	74.88	2V4R2030-40	•	2V4G2000-40	•
	4.10	1.00	74.88	2V4R2041-40	•	2V4G2041-40	•
21.0	7.40	1.50	78.62	2V4R2130-40	•	2V4G2100-40	•
22.0	7.70	1.70	82.37	2V4R2230-40	•	2V4G2200-40	•
24.0	8.00	1.75	89.86	2V4R2430-40	•	2V4G2400-40	•
25.0	8.10	1.75	93.60	2V4R2530-40	•	2V4G2500-40	•
	5.10	1.30	93.60	2V4R2551-40	•	2V4G2551-40	•
26.0	8.20	1.75	97.34	2V4R2630-40	•	2V4G2600-40	•
28.0	9.00	2.00	104.83	2V4R2830-40	•	2V4G2800-40	•
30.0	10.00	2.00	112.32	2V4R3030-40	•	2V4G3000-40	•
32.0	11.00	2.00	119.81	2V4R3230-40	•	2V4G3200-40	•
	6.50	1.60	119.81	2V4R3265-40	•	2V4G3265-40	•

Carbide rods, KX 40

3 coolant holes 30° helix, length 330 mm
unground open tolerance or ground to h6



NET PRICE LIST

Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE unground	unground	ARTICLE CODE ground, h6	ground, h6
6.0	2.9	0.50	32.65	3V3R0630-40	•	3V3G0600-40	•
7.0	4.0	0.65	38.09	3V3R0730-40	•	3V3G0700-40	
8.0	4.0	0.70	43.53	3V3R0830-40	•	3V3G0800-40	•
9.0	5.1	0.85	48.97	3V3R0930-40	•	3V3G0900-40	
10.0	5.1	0.85	54.41	3V3R1030-40	•	3V3G1000-40	•
11.0	5.7	1.10	59.86	3V3R1130-40	•	3V3G1100-40	
12.0	6.3	1.10	65.30	3V3R1230-40	•	3V3G1200-40	•
13.0	6.8	1.20	70.74	3V3R1330-40	•	3V3G1300-40	
14.0	7.3	1.40	76.18	3V3R1430-40	•	3V3G1400-40	•
15.0	7.8	1.40	81.62	3V3R1530-40	•	3V3G1500-40	
16.0	8.3	1.60	87.06	3V3R1630-40	•	3V3G1600-40	•
17.0	8.6	1.60	92.50	3V3R1730-40	•	3V3G1700-40	
18.0	9.5	1.70	97.95	3V3R1830-40	•	3V3G1800-40	•
19.0	10.2	1.70	103.39	3V3R1930-40	•	3V3G1900-40	
20.0	10.2	1.90	108.83	3V3R2030-40	•	3V3G2000-40	•
21.0	11.1	2.00	114.27	3V3R2130-40	•	3V3G2100-40	
22.0	11.5	2.00	119.71	3V3R2230-40	•	3V3G2200-40	•
24.0	12.1	2.00	130.59	3V3R2430-40	•	3V3G2400-40	
25.0	12.5	2.00	136.03	3V3R2530-40	•	3V3G2500-40	•
26.0	13.1	2.00	141.48	3V3R2630-40	•	3V3G2600-40	•
28.0	14.1	2.50	152.36	3V3R2830-40	•	3V3G2800-40	•
30.0	15.1	2.50	163.24	3V3R3030-40	•	3V3G3000-40	•
32.0	16.1	3.00	174.12	3V3R3230-40	•	3V3G3200-40	•

Carbide rods, KX 40

3 coolant holes 40° helix, length 330 mm
unground open tolerance or ground to h6



NET PRICE LIST

Ø mm	PITCH CIRCLE mm	HOLE mm	PITCH mm	ARTICLE CODE unground	unground	ARTICLE CODE ground, h6	ground, h6
6.0	2.2	0.50	22.46	3V4R0630-40	•	3V4G0600-40	•
8.0	2.7	0.65	29.95	3V4R0830-40	•	3V4G0800-40	•
10.0	3.5	0.80	37.44	3V4R1030-40	•	3V4G1000-40	•
12.0	4.2	0.90	44.93	3V4R1230-40	•	3V4G1200-40	•
14.0	4.7	1.00	52.42	3V4R1430-40	•	3V4G1400-40	•
15.0	5.1	1.10	56.16	3V4R1530-40	•	3V4G1500-40	•
16.0	5.5	1.20	59.90	3V4R1630-40	•	3V4G1600-40	•
18.0	6.3	1.40	67.39	3V4R1830-40	•	3V4G1800-40	•
19.0	6.7	1.40	71.14	3V4R1930-40	•	3V4G1900-40	•
20.0	7.1	1.50	74.88	3V4R2030-40	•	3V4G2000-40	•
21.0	7.4	1.50	78.62	3V4R2130-40	•	3V4G2100-40	•
22.0	7.7	1.70	82.37	3V4R2230-40	•	3V4G2200-40	•
24.0	8.0	1.75	89.86	3V4R2430-40	•	3V4G2400-40	•
25.0	8.1	1.75	93.60	3V4R2530-40	•	3V4G2500-40	•
26.0	8.2	1.75	97.34	3V4R2630-40	•	3V4G2600-40	•
28.0	9.0	2.00	104.83	3V4R2830-40	•	3V4G2800-40	•
30.0	10.0	2.00	112.32	3V4R3030-40	•	3V4G3000-40	•
32.0	11.0	2.00	119.81	3V4R3230-40	•	3V4G3200-40	•

Carbide flat/square bars, KX 40

length 330 mm

unground open tolerance

**NET PRICE LIST**

ARTICLE CODE	WIDTH mm	HEIGHT mm	LENGTH mm	
FLR0103330-40	1.3	3.3	330	•
QR0202330-40	2.3	2.3	330	•
FLR0203330-40		3.3	330	•
FLR0204330-40		4.3	330	•
FLR0205330-40		5.3	330	•
FLR0206330-40		6.3	330	•
FLR0207330-40		7.3	330	•
FLR0208330-40		8.3	330	•
FLR0210330-40		10.3	330	•
FLR0212330-40		12.3	330	•
FLR0215330-40		15.3	330	•
FLR0216330-40		16.3	330	•
FLR0220330-40		20.3	330	•
FLR0225330-40		25.3	330	•
QR0303330-40	3.3	3.3	330	•
FLR0304330-40		4.3	330	•
FLR0305330-40		5.3	330	•
FLR0306330-40		6.3	330	•
FLR0307330-40		7.3	330	•
FLR0308330-40		8.3	330	•
FLR0309330-40		9.3	330	•
FLR0310330-40		10.3	330	•
FLR0312330-40		12.3	330	•
FLR0314330-40		14.3	330	•
FLR0315330-40		15.3	330	•
FLR0316330-40		16.3	330	•
FLR0318330-40		18.3	330	•
FLR0320330-40		20.3	330	•
FLR0325330-40		25.3	330	•
FLR0330330-40		30.3	330	•

Carbide flat/square bars, KX 40

length 330 mm

unground open tolerance

**NET PRICE LIST**

ARTICLE CODE	WIDTH mm	HEIGHT mm	LENGTH mm	
QR0404330-40	4.3	4.3	330	•
FLR0405330-40		5.3	330	•
FLR0406330-40		6.3	330	•
FLR0408330-40		8.3	330	•
FLR0410330-40		10.3	330	•
FLR0412330-40		12.3	330	•
FLR0414330-40		14.3	330	•
FLR0415330-40		15.3	330	•
FLR0416330-40		16.3	330	•
FLR0420330-40		20.3	330	•
FLR0425330-40		25.3	330	•
FLR0430330-40		30.3	330	•
QR0505330-40	5.3	5.3	330	•
FLR0508330-40		8.3	330	•
FLR0510330-40		10.3	330	•
FLR0513330-40		13.3	330	•
FLR0515330-40		15.3	330	•
FLR0516330-40		16.3	330	•
FLR0518330-40		18.3	330	•
FLR0520330-40		20.3	330	•
FLR0525330-40		25.3	330	•
FLR0530330-40		30.3	330	•
FLR0535330-40		35.3	330	•
QR0606330-40	6.3	6.3	330	•
FLR0616330-40		16.3	330	•
FLR0620330-40		20.3	330	•
FLR0625330-40		25.3	330	•
QR0808330-40	8.3	8.3	330	•
QR1010330-40	10.3	10.3	330	•
QR1212330-40	12.3	12.3	330	•




PREMEX

EFFICIENCY IN CARBIDE MATTERS

PREMEX GmbH

Hartmetall / Schleiftechnik
Im Hölderle 28
D-75196 Remchingen

Phone +49 (0) 7232/31 99-0
info@premex.de
www.premex.de

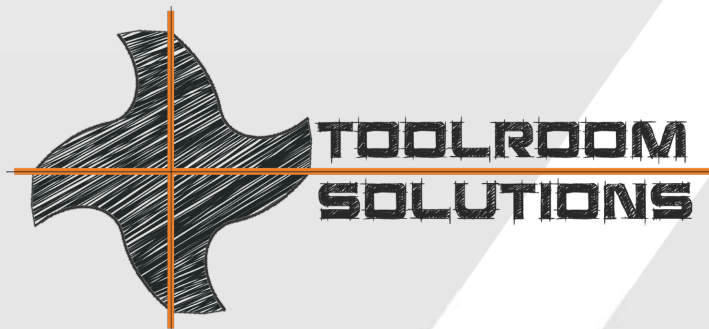

Toolroom Solutions Inc.
8824 Old Block House Ln
Spotsylvania, VA 22551 USA

Phone +1 (540) 940-5977
info@toolroom.solutions
www.toolroom.solutions